


# Technical Data

## TM2-LS (USB)

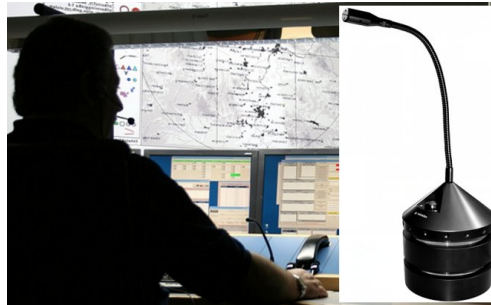

TM2-LS is a table microphone for use in control stations or Air Traffic Control centres

- table microphone made of anodized aluminium
- integrated speaker
- high stability
- flexible and filigree gooseneck microphone
- available with or without send button
- excellent sound quality in all directions
- for splitting operation, we offer the TM2-LS2
- available with different connectors incl. USB

### Technical data

#### Additional data

Life cycle PTT: min. 500.000 cycles  
Length gooseneck: 22 cm

#### Microphone

Frequency range: 100 Hz – 12 kHz  
Pattern: electret

Directional: non-directional  
Impedance: 1000 Ohm  
Sensitivity: -47 dB V / Pa, 1 kHz

#### Speaker

Pattern: magnetic  
Impedance: 8 Ohm at 1 W / 1 kHz

Sound pressure level: 84 dB at 1 W / 1 m  
Frequency range: 20 Hz – 20 kHz

#### Additional Data

Temperature range: 0°C to +55°C  
Weight: 1400 g